




No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
			
			

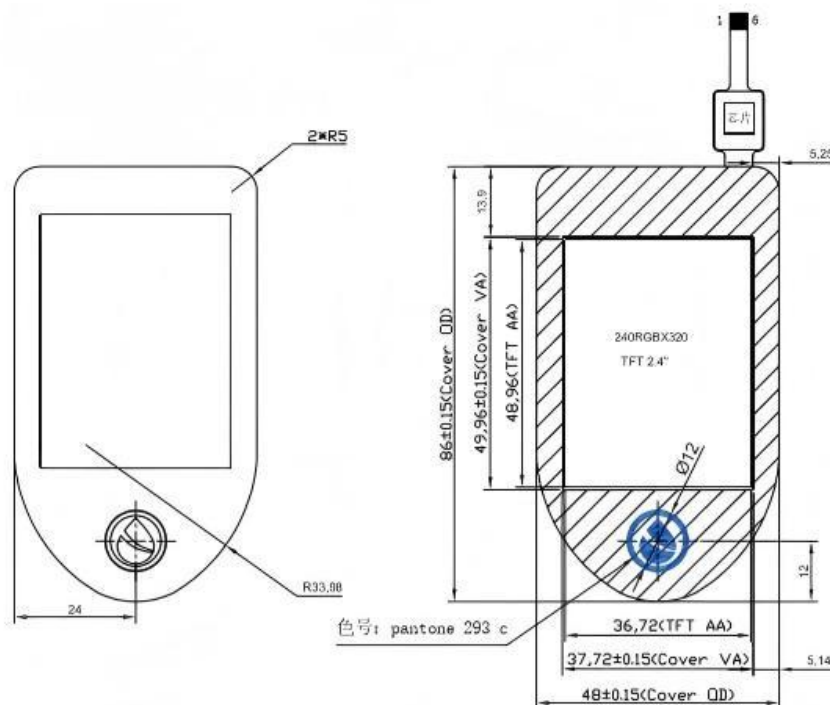

 Screen printing area: white

 pantone 293c

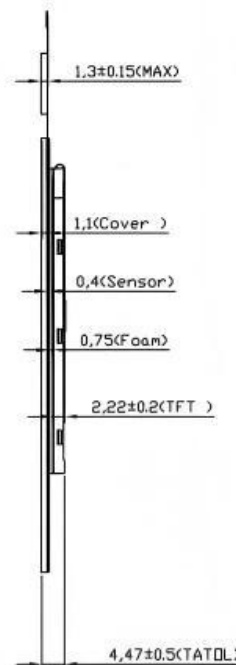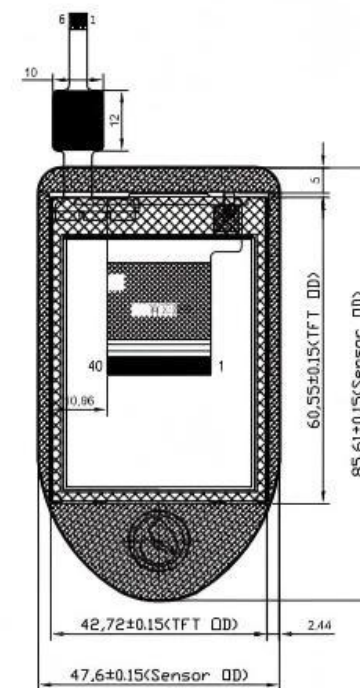 Adhesive Area 0.175mm Foam Area 0.75mm

PIN	DESCRIPTION
1	GND
2	GND
3	GND
4	NC
5	LEDK4
6	LEDK3
7	LEDK2
8	LEDK1
9	LED A
10	NC
11	RESET
12	DB15
13	DB14
14	DB13
15	DB12
16	DB12
17	DB11
18	DB10
19	DB9
20	DB8
21	DB7
22	DB6
23	DB5
24	DB4
25	DB3
26	DB2
26	DB1
27	DB0
28	/RD
29	/WR
30	RS
31	/CS
32	TE
33	VCI
34	IOVCC
35	GND
36	YD
37	XR
38	YU
39	XL
40	JM0


Cover

Front view

Side view

Back view

Technical parameters				TP IIC PIN	
1. Interfaces:	I2C	7. Humidity range:	45~85%RH	1	INT3. 3V
2. Structure :	G+F+F (Air bonding)	8. Transmittance:	≥85%	2	VDD3. 3V
3. IC solutions:	CYTMA368	9. Surface hardness:	≥6H	3	SCL3. 3V
4. Impact resistance :	(3.0±0.03, 5000J) / 0.04kg/Height (30m/111in)	10. Operate :	-10℃~+60℃, ≤85%RH	4	SDA3. 3V
5. Touch points:	10 points	11. Storage :	-20℃~+70℃, ≤85%RH	5	RST3. 3V
6. Power supply:	3. 3V	12. Unmarked dimension tolerance	as ±0.2	6	GND



DETAIL 3: 1



杭州宏巢科技有限公司
GraHowlet Technology CO.,Ltd

Model	HX0241701			view direction		Unit	MM
Version	V1.0	Designer	LUO	Date	2017-12-18	Edition	A1
Customer		Approved	HBZ	Date	2017-12-18	Proportion	1:1