
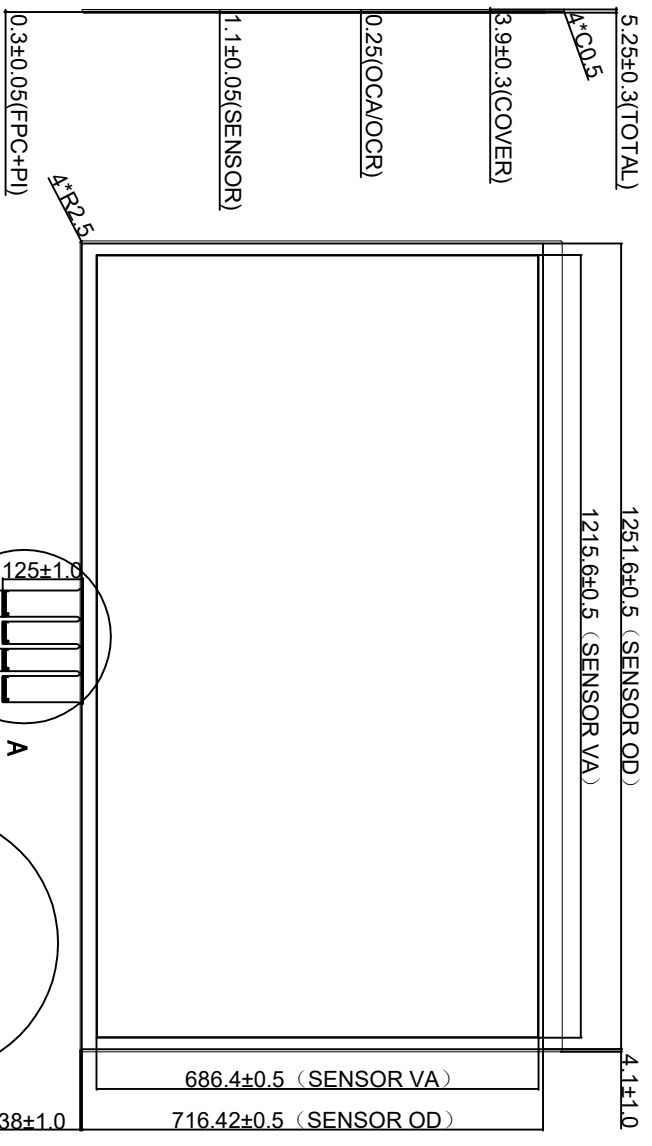


No ROHS hazardous material

Ordinal	Modify content description	Cartographer/date of change
Δ		
Δ		
Δ		

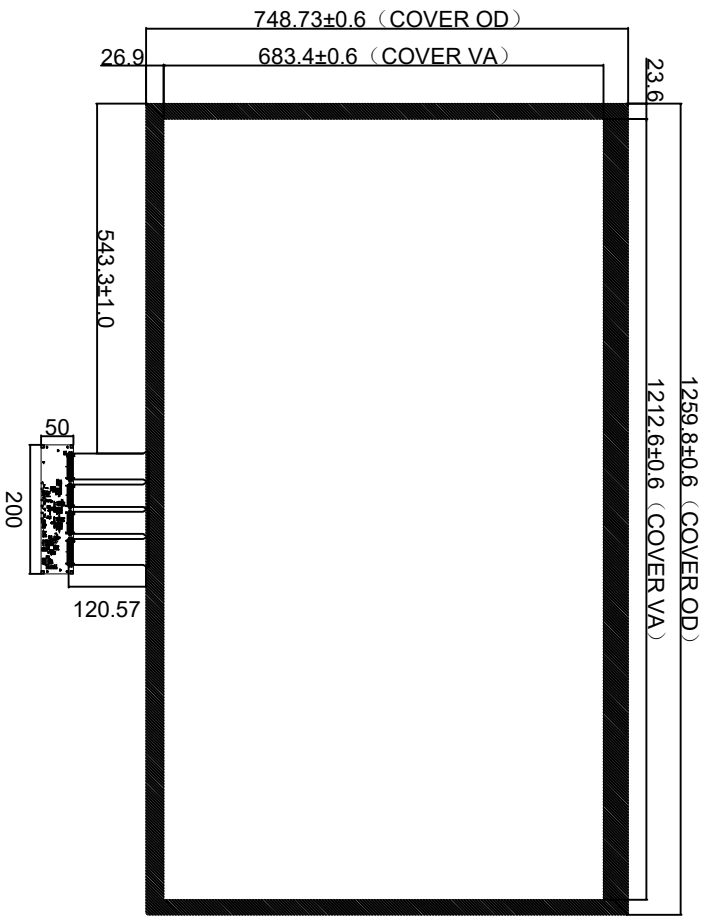


Screen printing area: Print Black

Front view

Side view

Back view

DETAIL "A"
2:1

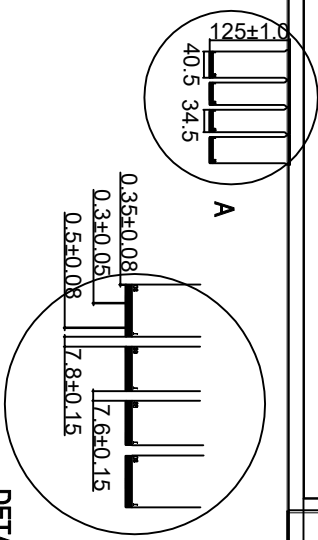

Technical parameters

1. Interfaces:	USB	7. Humidity range:	45~85%RH
2. Structure :	G+C	8. Transmittance:	≥85%
3. IC solutions:	ILI2325	9. Surface hardness:	≥6H
4. Impact resistance:	35.00D/A, Steel Ball/225g/ Height=35mm/1time	10. Operate :	-20°C~+70°C, ≤85%RH
5. Touch points:	10 points	11. Storage :	-30°C~+80°C, ≤85%RH
6. Power supply:	5V	12. Unmarked dimension tolerance	as±0.5

USB Connector

1	VBUS(5V)
2	USB_D-
3	USB_D+
4	GND



杭州宏梟科技有限公司
GraHowlet Technology CO., Ltd

Model	view direction	Unit
HX5501801		MM
Version	VI. 0	Designer
		LU0
Customer	Approved	Vito
	Date	2018-07-05
	Date	2018-07-05
	Proportion	1:1